

# Technical details

Because of specificity of program it continued to the specific of the specific



#### **ORNAMENT GLASS**

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is ornament.
In program ">»Elite« you can choose from: master carre-MK, master line-ML and satinato-PJ.



#### **SATINATO WITH BEVELS**

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is satinato, on which bevels in white, blue, green and red color are glued.




### SATINATO WITH A LEAD STRIP AND BEVELS

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is satinato, on which bevels in white, blue, green and red color are glued - on both sides it is edged with a silver lead strip.



### SANDBLASTED SATINATO WITH BEVELS

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is sandblasted satinato on which bevels in white, blue, green and red color are glued.



### SANDBLASTED FLOAT GLASSS WITH BEVELS

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is a float glass on which different decors with a glued bevels in white, blue, green and red color are sandblasted.



#### SANDBLASTED FLOAT GLASS WITH A LEAD STRIP

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is a float glass, on which different decors are sandblasted.

It is also edged with a silver lead strip on both sides.



### **SANDBLASTED FLOAT GLASS**

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is a float glass on which different decors are sandblasted.



### **SANDBLASTED SATINATO**

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is sandblasted satinato glass with different decors.




### **SANDBLASTED MIRROR**

IZO glass, thickness 20mm, outer glass is transparent float 4mm and inner glass is sandblasted mirror with different decors.





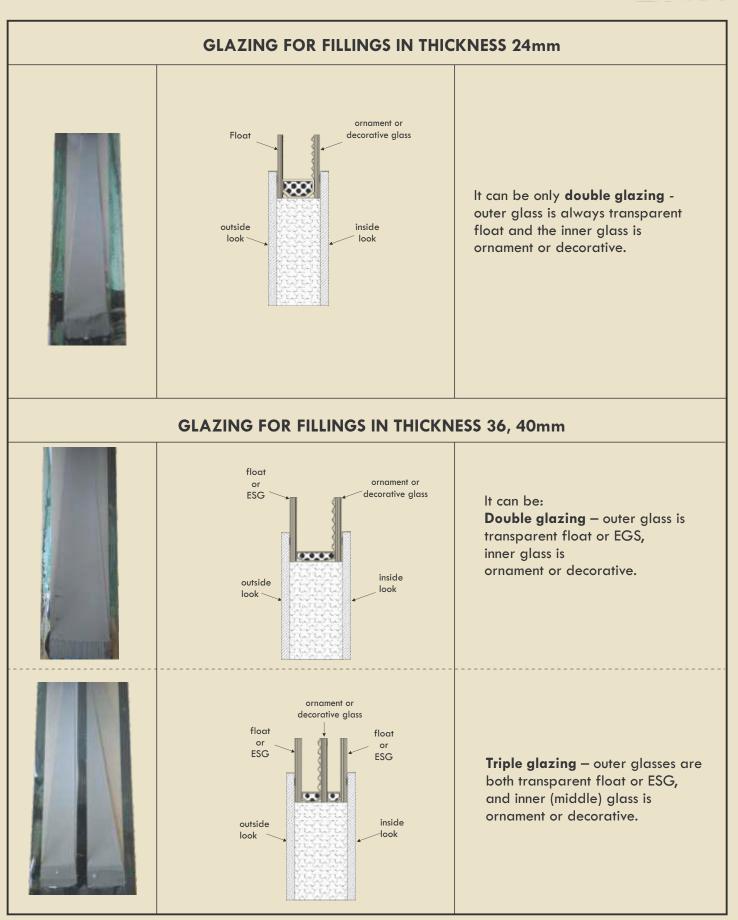

Minimum thickness of the filling with 3-layer glass can be 30mm.

## Aluminium COlor — standard offer



Specified colors are in the standard offer. In the additional offer there are all the other colors from the RAL scale.


## Aluminium color wooden decor — special offer

In the offer, we have 22 wooden aluminum decors. We've chosen the most popular.



# Applications



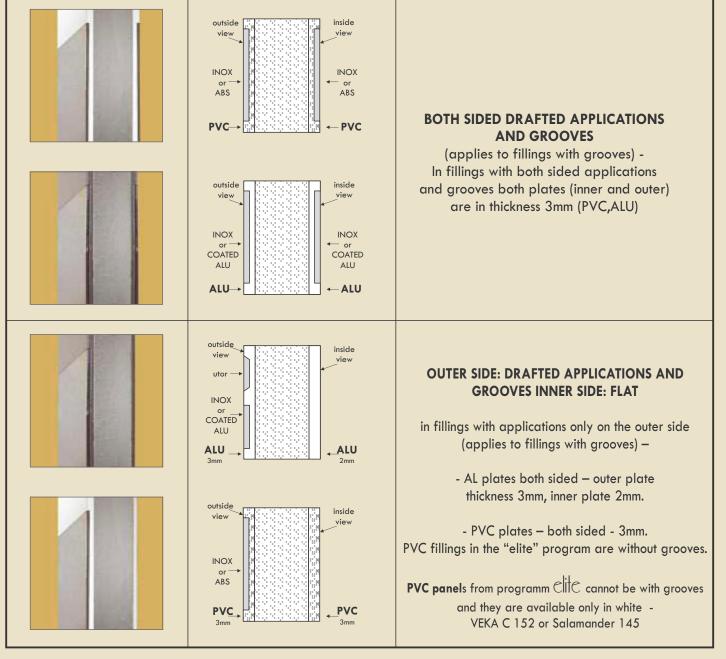


All fillings in the clife, clifet i Sample have the Scotch Brite (matte) INOX applications - INXC.

Polished INOX application – INXP – can be supplied only with a special order alongside the order of a filling. Applications on the PVC fillings can be in INOX and ABS color (grey, red, blue and green are in the offer). Applications on the ALU fillings can be either INOX or colored aluminum.

Because of the specific production procedure **Bern, Cardiff, Hamburg, Lisabon, Ljubljana** i **Maribor** - fillings with INOX applications have to be ordered on exact measure.

## Cross-sections

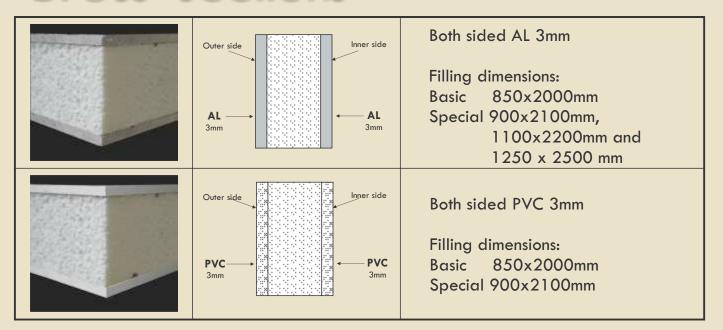

Filling cross-section is a both sided plate – PVC, ALU – between which is glued extruded polystiyrol insulation.

The thickness of insulation depends on the thickness of the filling.

Standard filling thickness is 24, 36, 40 mm. Different thickness can be specially ordered.

Filling can be installed in all doors made out of standard PVC or ALU profiles for entrance doors. Tolerance in the thickness of the filling is  $\pm$ 1 mm.

With cutting the fillings to fit a custom measure, a deviation of up to 2mm in height and width can be expected.

### Hidden wing



Classic wing






FOOT PROTECTION		height 100mm thickness 1 mm	polished INOX - PZP 10 matte INOX - PZC 11
		height 100mm thickness 1 mm	polished INOX - OZP 10
		height 100mm thickness 1 mm	matte INOX - OZC 11 polishedi INOX - KZP 10
			matte INOX - KZC 11
ROSETTE		dimensions 37,5x74mm thickness 1 or 5mm	polished INOX- 1mm- ROP 10 polished INOX- 5mm- ROP 50
			matte INOX - ROC 11
	dimensions 37,5x54mm thickness 1 or 5mm	polished INOX- 1mm- RKP 10 polished INOX- 5mm- RKP 50	
		•	matte INOX - RKC 11
LED DIODE		dimensions 46x46mm thickness 7mm	LED diode square - LDK (on panel we mount two LED diode with adapter)
		dimensions Ø45mm thickness 7mm	LED diode round - LDO (on panel we mount two LED diode with adapter)
HOUSE NUMBERS		one-digit house number height 90mm thickness 1 mm	polished INOX - BJP 10
			matte INOX - BJC 11
		two-digit house number height 90mm thickness 1mm	polished INOX - BDP 10
			matte INOX - BDC 11
		three-digit house number height 90mm thickness 1mm	polished INOX - BTP 10
			matte INOX - BTC 11





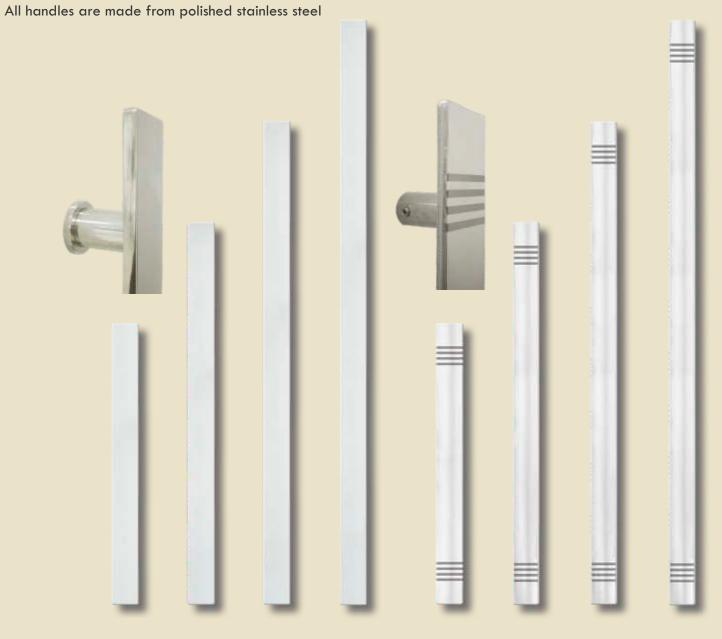



 5mm
 DPS 550
 DPS 750
 DPS 950
 DPS 115
 DPK 550
 DPK 750
 DPK 950
 DPK 115

 8mm
 DOS 550
 DOS 750
 DOS 950
 DOS 115
 DOK 550
 DOK 750
 DOK 950
 DOK 115



### HANDLE INSTALLATION TYPE

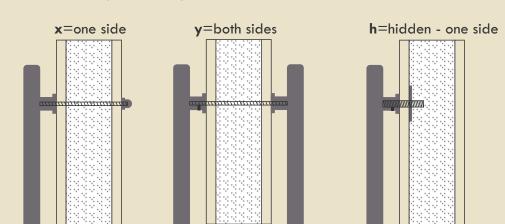


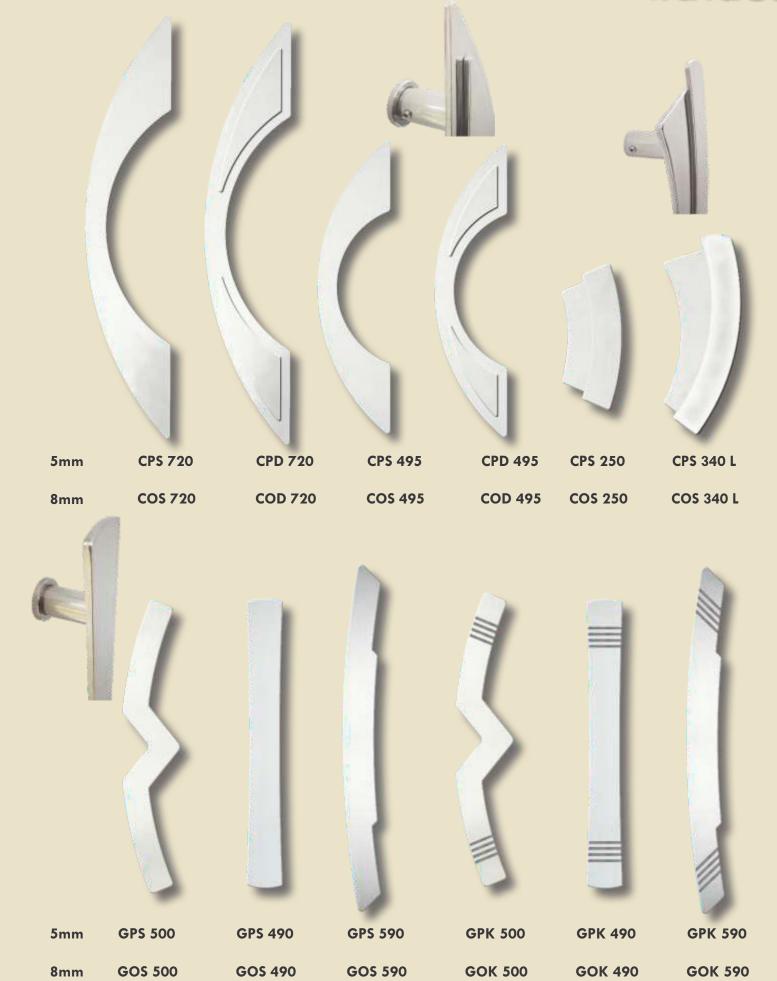




Polished or brushed finish stainlees steel - rounded or square - 90 or 45 angle mount.



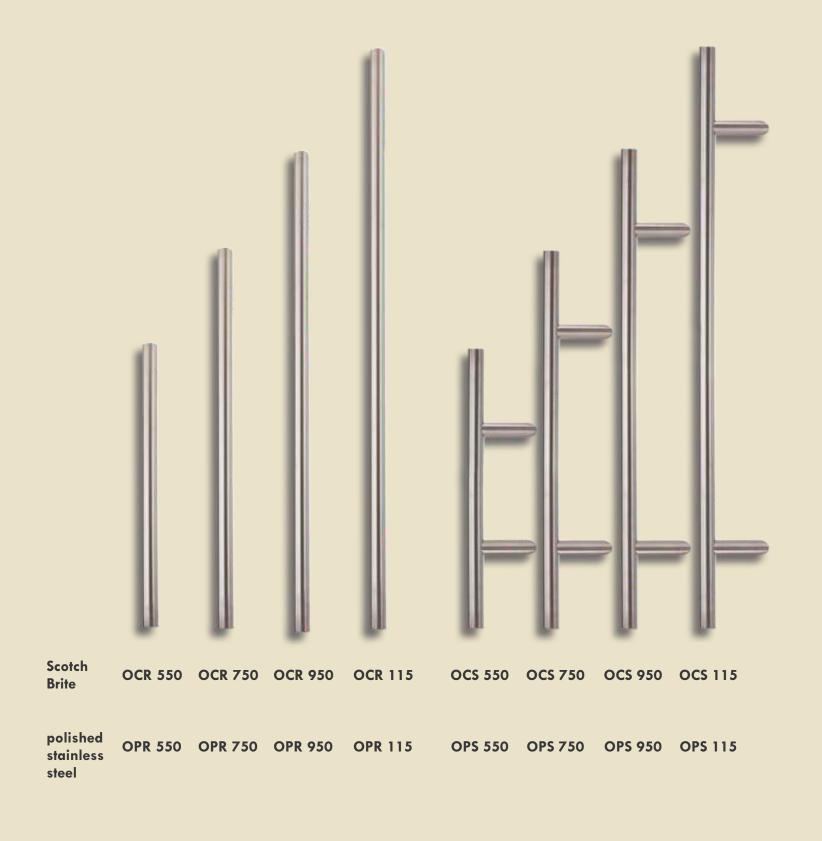


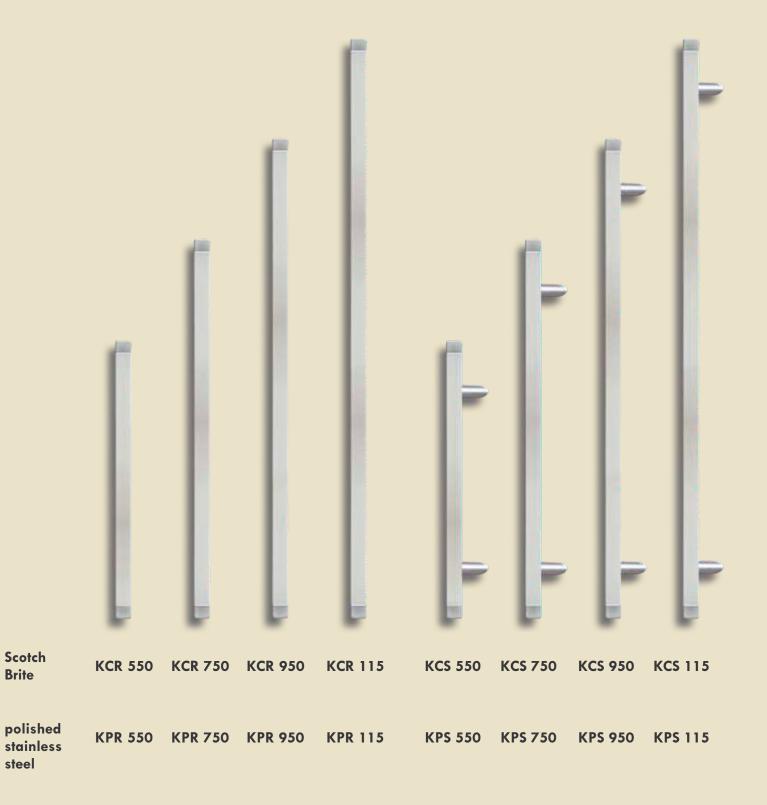



Brite

steel


### Dimensions and schematic views of decorative panels elite

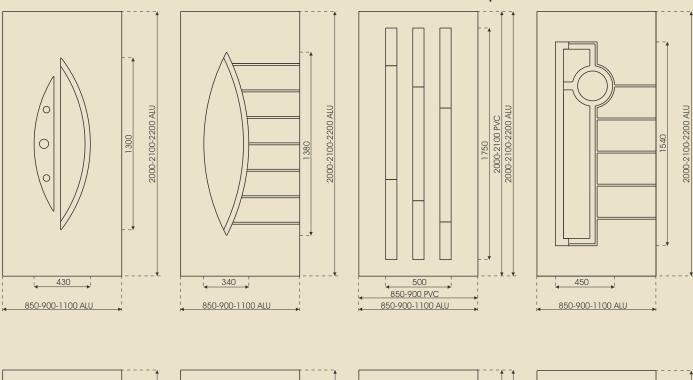

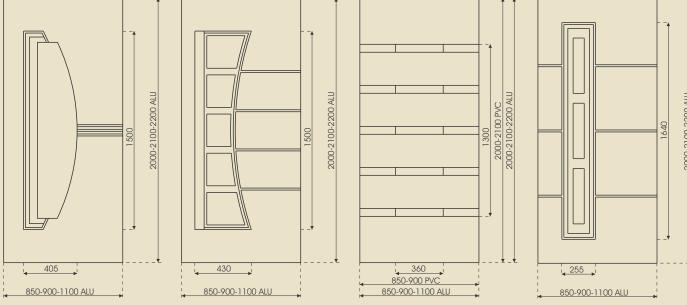

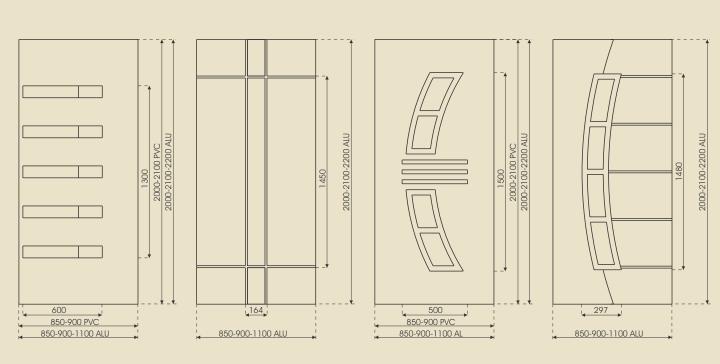

### Dimensions and schematic views of decorative panels elite

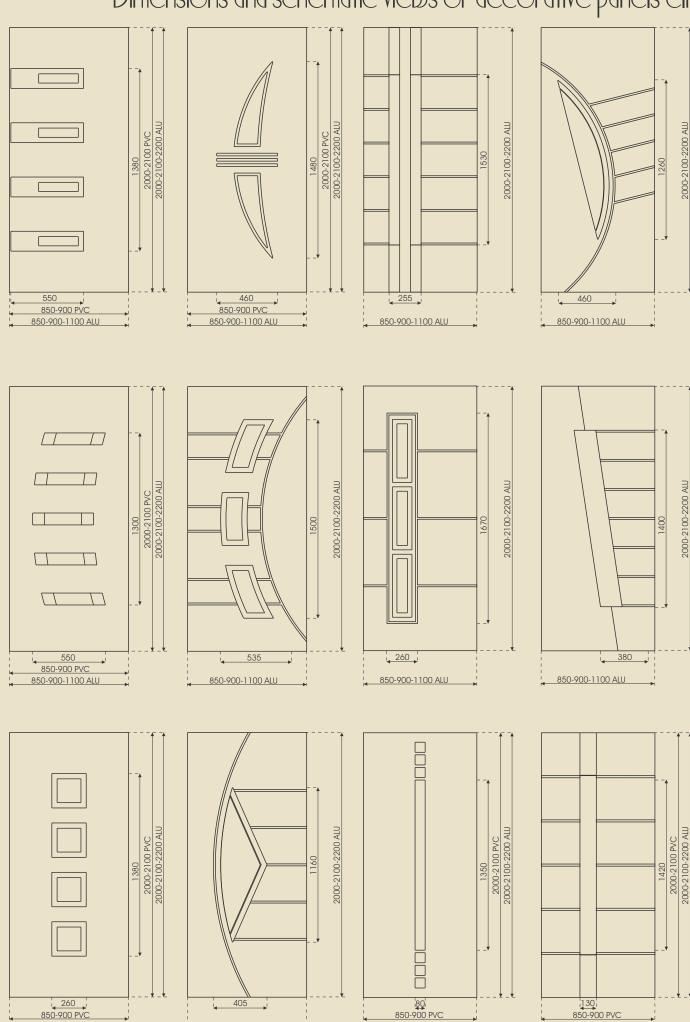


850-900-1100 ALU

850-900-1100 ALU

850-900-1100 ALU

850-900 PVC 850-900-1100 ALU

### Dimensions and schematic views of decorative panels elite

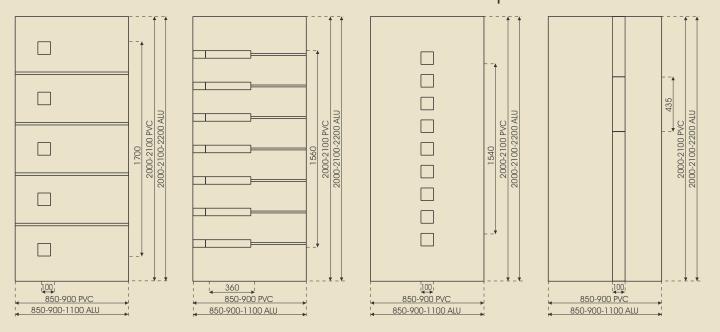

### Dimensions and schematic views of decorative panels elite \*

